



**YSE**  
YOUR SAFETY EXPERT

[www.ysefire.com](http://www.ysefire.com)



## 公司简介

# INTRODUCTION

上海永事逸消防设备有限公司是隶属于上海盛立集团旗下的子公司。上海盛立集团旗下拥有6家独立的子公司，业务范围涵盖消防设备的进出口，国际货运业务，仓储业务等。盛立集团年产值大约40,000,000.00美金，于2014年6月25日在上海股权交易中心成功挂牌上市。

上海永事逸消防设备有限公司是国内消防行业内一家大型的集科研、设计、制造、销售服务为一体的现代化股份制企业。公司专业从事消防队员装备、抢险救援器材，个人防护用品，特种劳动保护用品等产品的生产和销售。公司生产的产品广泛适用于消防、冶金、石化、军队、警察等行业，能够满足不同工种的需要，产品销往全国各大港口、远洋船舶、公安消防、电力、海洋平台等企事业单位。

公司拥有一支强大的研发与设计团队，可以为顾客提供产品定制服务，同时配备多语种专业的营销人员为客户提供24小时全方位服务。因此，近年来，公司的产品远销海外30多个国家和地区，营销网络遍及全球。



Shanghai YSE Fire Fighting Equipments Co., Ltd is one of the branch company of Shanghai Shengli Group, which has 6 independent son companies, business range from fire fighting equipments, international logistics, domestic warehouse, annual turnover of whole group is around USD 40, 000, 000.00. And our Shengli Group was been listed in Shanghai Equity Center on June, 25th,2014.

Shanghai YSE Fire Fighting Equipments Co., Ltd. is one of the leading manufacturers in fire fighting industry, integrating R&D, manufacturing and sales service as a whole. Our company specializes in the research, manufacturing and sale of men's fire-fighting equipments, emergency rescue tools, personal protective equipments, and special labor protective facilities. Our products are widely used in fire fighting, metallurgy, chemical, army, police, and other public safety industry, and service for many big ocean ports, ocean ships & vessels, electric power stations, chemical industry, ocean platforms and other organizations all over China.

Our company owns an outstanding R&D team, can offer OEM &ODM services for the clients, and meanwhile our company has many multi-language professional sales people to offer 24 hours non-stopping service to our clients. Therefore, in recent years, our products are widely accepted and exported to more than 30 regions and countries and our sales network is now covering all corners of the world.

# DEVELOPMENT

发展概况





2005 年在中国上海市杨浦区设立公司  
2005: Shanghai YSE company was set up

2007 年通过 ISO9001、GB/ T19001 质量管理体系认证  
2007: YSE got ISO9001, GB/ T19001 quality management approval

2008 年通过欧盟 EN ISO 20345、EN15090 认证  
2008: YSE got EN ISO 20345, EN15090 certificate

2010 年通过欧盟 EN469、SGS 测试认证  
2010: YSE got EN469, SGS test certificate

2011 年通过欧盟 EN136、EN137 测试认证  
2011: YSE got EN136, EN137 test certificate

2014 年 集团公司在上海股权交易中心上市  
2014: YSE Group company became a public company

2016.....



# EN standard turnout gear

# EN Standard Turnout Gear

Model No.: FCEN02



- Product name: Turnout Gear
- Outer shell: m-aramid, p-aramid, anti-static
- Moisture barrier: aramid needlefelt, PTFE, PU
- Thermal barrier: m-aramid, p-aramid
- Comfortable lining: m-aramid, FR viscose
- Color: Navy blue
- Damaged length:  $\leq 100\text{mm}$
- Renewal burning time:  $\leq 2\text{s}$
- Hydrostatic pressure:  $\geq 17000\text{pa}$
- Standard: EN469: 2005

- 品 名: 消防战斗服
- 外 层: 间位芳纶, 对位芳纶, 防静电丝
- 防潮层: 芳纶毡, PTFE, PU
- 隔热层: 芳纶面料
- 舒适层: 芳纶粘胶阻燃布
- 产品颜色: 藏青色
- 损毁长度:  $\leq 100\text{mm}$
- 续燃时间:  $\leq 2\text{s}$
- 耐静水压:  $\geq 17000\text{pa}$
- 执行标准: EN469: 2005

# EN Standard Turnout Gear

**Model No.: FCEN01**



- Product name: Turnout Gear
- Outer shell: m-aramid, p-aramid, anti-static
- Moisture barrier: aramid needlefelt, PTFE, PU
- Thermal barrier: m-aramid, p-aramid
- Comfortable lining: m-aramid, FR viscose
- Color: Navy blue
- Damaged length:  $\leq 100\text{mm}$
- Renewal burning time:  $\leq 2\text{s}$
- Hydrostatic pressure:  $\geq 17000\text{pa}$
- Standard: EN469: 2005

- 品 名: 消防战斗服
- 外 层: 间位芳纶, 对位芳纶, 防静电丝
- 防潮层: 芳纶毡, PTFE, PU
- 隔热层: 芳纶面料
- 舒适层: 芳纶粘胶阻燃布
- 产品颜色: 藏青色
- 损毁长度:  $\leq 100\text{mm}$
- 续燃时间:  $\leq 2\text{s}$
- 耐静水压:  $\geq 17000\text{pa}$
- 执行标准: EN469: 2005



# EN Standard Turnout Gear

Model No.: FFSC



- Product name: Turnout Gear
- Outer shell: flame retardant cotton, anti-static
- Moisture barrier: aramid needlefelt, PTFE, PU
- Thermal barrier: m-aramid, p-aramid
- Comfortable lining: m-aramid, FR viscose
- Color: Navy blue
- Damaged length:  $\leq 100\text{mm}$
- Renewal burning time:  $\leq 2\text{s}$
- Hydrostatic pressure:  $\geq 17000\text{pa}$
- Standard: EN469: 2005

- 品名: 消防战斗服
- 外层: 防火棉, 防静电丝
- 防潮层: 芳纶毡, PTFE, PU
- 隔热层: 芳纶面料
- 舒适层: 芳纶粘胶阻燃布
- 产品颜色: 藏青色
- 损毁长度:  $\leq 100\text{mm}$
- 续燃时间:  $\leq 2\text{s}$
- 耐静水压:  $\geq 17000\text{pa}$
- 执行标准: EN469: 2005



# NFPA1971 Standard Turnout Gear

**Model No.: FCNF01**



- Product name: Turnout Gear
- Outer shell - Medium and Heavy: Brigade 750 --Nomex, Kevlar and Antistatic Fiber. Plain weave, with water repellent finish. Made by USA
- Moisture barrier: Stedair®3000, made of Nomex fiber laminated with PTFE membrane, Made by Canada
- Thermal barrier: Tencate Q-8™, meta-aramid
- DRD ( Drag Rescue Device) can be employed with one hand
- Color: yellow
- Standard: NFPA1971

- 品 名: 美标消防战斗服
- 外 层 - 中厚料: 美国原产 Brigade 750 -- 间位芳纶, 对位芳纶, 防静电纤维, 该面料为平纹, 外层经过防油拒水处理
- 防潮层: 加拿大原产 Stedair®3000, 芳纶纤维压覆盖于 PTFE 薄膜上而成
- 隔热层: Tencate Q-8™, 芳纶黏胶和阻燃晴纶
- DRD 装置: 消防员紧急救援拖拉带, 可单手拖拉
- 产品颜色: 黄色
- 执行标准: NFPA1971

# NFPA1971 Standard Turnout Gear

Model No.: FCNF02



- Product name: Turnout Gear
- Outer shell - Medium and Heavy: Advance - Nomex, Kevlar, Rip-stop weave, Made by USA
- Moisture barrier: Stedair®3000, made of Nomex fiber laminated with PTFE membrane, Made by Canada
- Thermal barrier: Aralite®, Meta aramid and Para aramid, Made by USA
- DRD ( Drag Rescue Device) can be employed with one hand
- Color: Khaki
- Standard: NFPA1971

- 品 名: 美标消防战斗服
- 外 层 - 中厚料: 美国原产 Advance 间位芳纶, 对位芳纶, 防撕织物
- 防潮层: 加拿大原产 Stedair®3000, 芳纶纤维压覆盖于 PTFE 薄膜上而成
- 隔热层: 美国原产 Aralite®, 间位芳纶和对位芳纶复合面料
- DRD 装置: 消防员紧急救援拖拉带, 可单手拖拉
- 产品颜色: 卡其色
- 执行标准: NFPA1971

# EN Standard Fire Proximity Suit

Model No.: FASSP-1000



- Product name: Fire Proximity Suit
- Outer shell: aluminum foil composite with Kevlar flame retardant fabric
- Thermal barrier: aramid felt
- Comfortable lining : aramid/ FR cotton woven fabric
- Temperature resistant :  $\geq 1000^{\circ}\text{C}$
- Peeling strength:  $\geq 12\text{N}/5\text{CM}$
- Breaking strength:  $\geq 650\text{N}$
- Color: silver
- Standard: EN469: 2005

- 品 名: 消防隔热服
- 外 层: 隔热铝箔 Kevlar 耐高温复合阻燃面料
- 隔热层: 芳纶毡
- 舒适层: 芳纶 / 阻燃棉面料
- 承受温度:  $\geq 1000^{\circ}\text{C}$
- 剥离强力:  $12\text{N}/5\text{CM}$
- 断裂强力:  $\geq 650\text{N}$
- 产品颜色: 银色
- 执行标准: EN469: 2005



# EN Standard Fire Entry Suit

**Model No.: FEESP-1000B**

## Package Details



- Product name: fire entry suit
- Number of layers: 6 layers
- Materials: fireproof and high temperature protective layer, heat resistant layer, water proof layer, comfortable layer, etc
- Characteristics: advanced fireproof and heat insulation traits
- Style: Jacket, Pants, Golden Face Shield, Mitten, Fire Resistant Shoes
- Size: S, M, L, XL, XXL, XXXL
- SCBA bag: for option
- Color: silver
- Standard: EN469: 2005
- Application: the firefighter wears the suit for protecting himself when putting out a fire in the situation of 1000 °C

- 品 名: 消防避火服
- 层 数: 6层防护
- 产品面料: 防火和高温防护层, 隔热层, 隔水层, 舒适层等
- 产品特点: 先进的防火、隔热特性
- 产品款式: 夹克, 背带裤, 镀金面屏, 连指手套, 鞋套
- 产品尺码: S, M, L, XL, XXL, XXXL
- 呼吸器包: 可选配
- 产品颜色: 银色
- 执行标准: EN469: 2005
- 产品用途: 用于消防员短时间穿越 1000 度火区进行抢险救援作业

# EN Standard SCBA

Model No.: BAC1M6.8L



• Natural silicon mask



• Demand valve



• Pressure regulator



• M18\*1.5 cylinder valve



• Pressure gauge



• Alarm whistle



• Nomex strips



• Fast connector coupling

- Product name: Self-contained positive pressure air breathing apparatus
- Cylinder Volume: 6.8 L
- Cylinder Materials: Carbon Fiber
- Working pressure: 30Mpa
- Alarm pressure: 5.5±0.5Mpa
- Alarm sound: ≥90db
- Using temperature: -30℃ --60℃
- Time of using: 60 min
- Model Alternatives: 2, 3, 4.7, 9 L
- Standard: EN 137: 2006
- Gross Weight: 14 kg
- Packing Sizes: 30\*46\*74cm /carton

- 品名: 自给正压式消防空气呼吸器
- 气瓶容量: 6.8L
- 气瓶材质: 碳纤维复合`材料
- 工作压力: 30Mpa
- 报警压力: 5.5±0.5Mpa
- 报警音量: ≥ 90db
- 工作温度: -30℃ --60℃
- 使用时间: 60 分钟
- 替代款式: 2, 3, 4.7, 9 升
- 执行标准: EN 137: 2006
- 产品毛重: 14 kg
- 包装尺寸: 30\*46\*74cm/ 箱

# Intelligent Parts of SCBA System



## Model No.: BADPG

- Product name: Digital Pressure Gauge
- Operating Voltage: 3 V
- Continuous Standby Time:  $\geq 24$  hours
- Wireless communication distance:  $\geq 1.5$  M
- Display the range of air pressure: 0-40Mpa
- Protection class: IP67

- 品名: 电子压力表
- 工作电压: 3 V
- 工作时长:  $\geq 24$  小时
- 无线传输距离:  $\geq 1.5$  M
- 防护等级: IP67



## Model No.: BAHUD

Product name	Head Up Display
Pressure value	Pressure Status Indication
pressure $\geq 10$ MPa	Constant green light
$10 \leq$ pressure $\leq 6$ MPa	Constant yellow light
pressure $< 6$ MPa	Red light flashes, and a vibrating alert

品名	压力平视显示器
压力值	指示状态
压力 $\geq 10$ MPa	绿灯常亮
$10 \leq$ 压力 $\leq 6$ MPa	黄灯常亮
压力 $< 6$ MPa	红灯闪烁, 震动



## Model No.: BAEMU60

- Product name: Electronic Monitoring Unit
- Operating Voltage: 3.6V
- Detect pressure range: 0~40MPa
- Wireless communication distance:  $\geq 1.5$  M
- Protection class: IP67

- 品名: 无线压力传感控制器
- 工作电压: 3.6V
- 检测压力范围: 0~40MPa
- 无线传输距离:  $\geq 1.5$  M
- 防护等级: IP67




## Model No.: BAPDAU

- Product name: Personal Distress Alarm Unit
- Operating Current: 53-400mA
- Operating Voltage: 7.4 V
- Continuous Standby Time:  $\geq 24$  hours
- Alarm Sound Intensity:  $\geq 100$  dB(distance: 1m)
- Communication Distance:  $\geq 800$  M (wildland)

- 品名: 个人卫士
- 工作电流: 53-400mA
- 工作电压: 7.4 V
- 待机时长:  $\geq 24$  小时
- 报警音量:  $\geq 100$ db
- 通讯距离:  $\geq 800$  米 (旷野)

# Intelligent Electronic Air Respirator

- Breathing apparatus does not depend on the gas of the external environment, any pressure in the breathing mask is greater than the environmental pressure. It is equipped with intelligent electronic devices, commanders real-time monitoring the situation of firefighters' gas source, safety status. When the firefighters meet a crisis, the commander can command the firefighters to evacuate the scene in time.

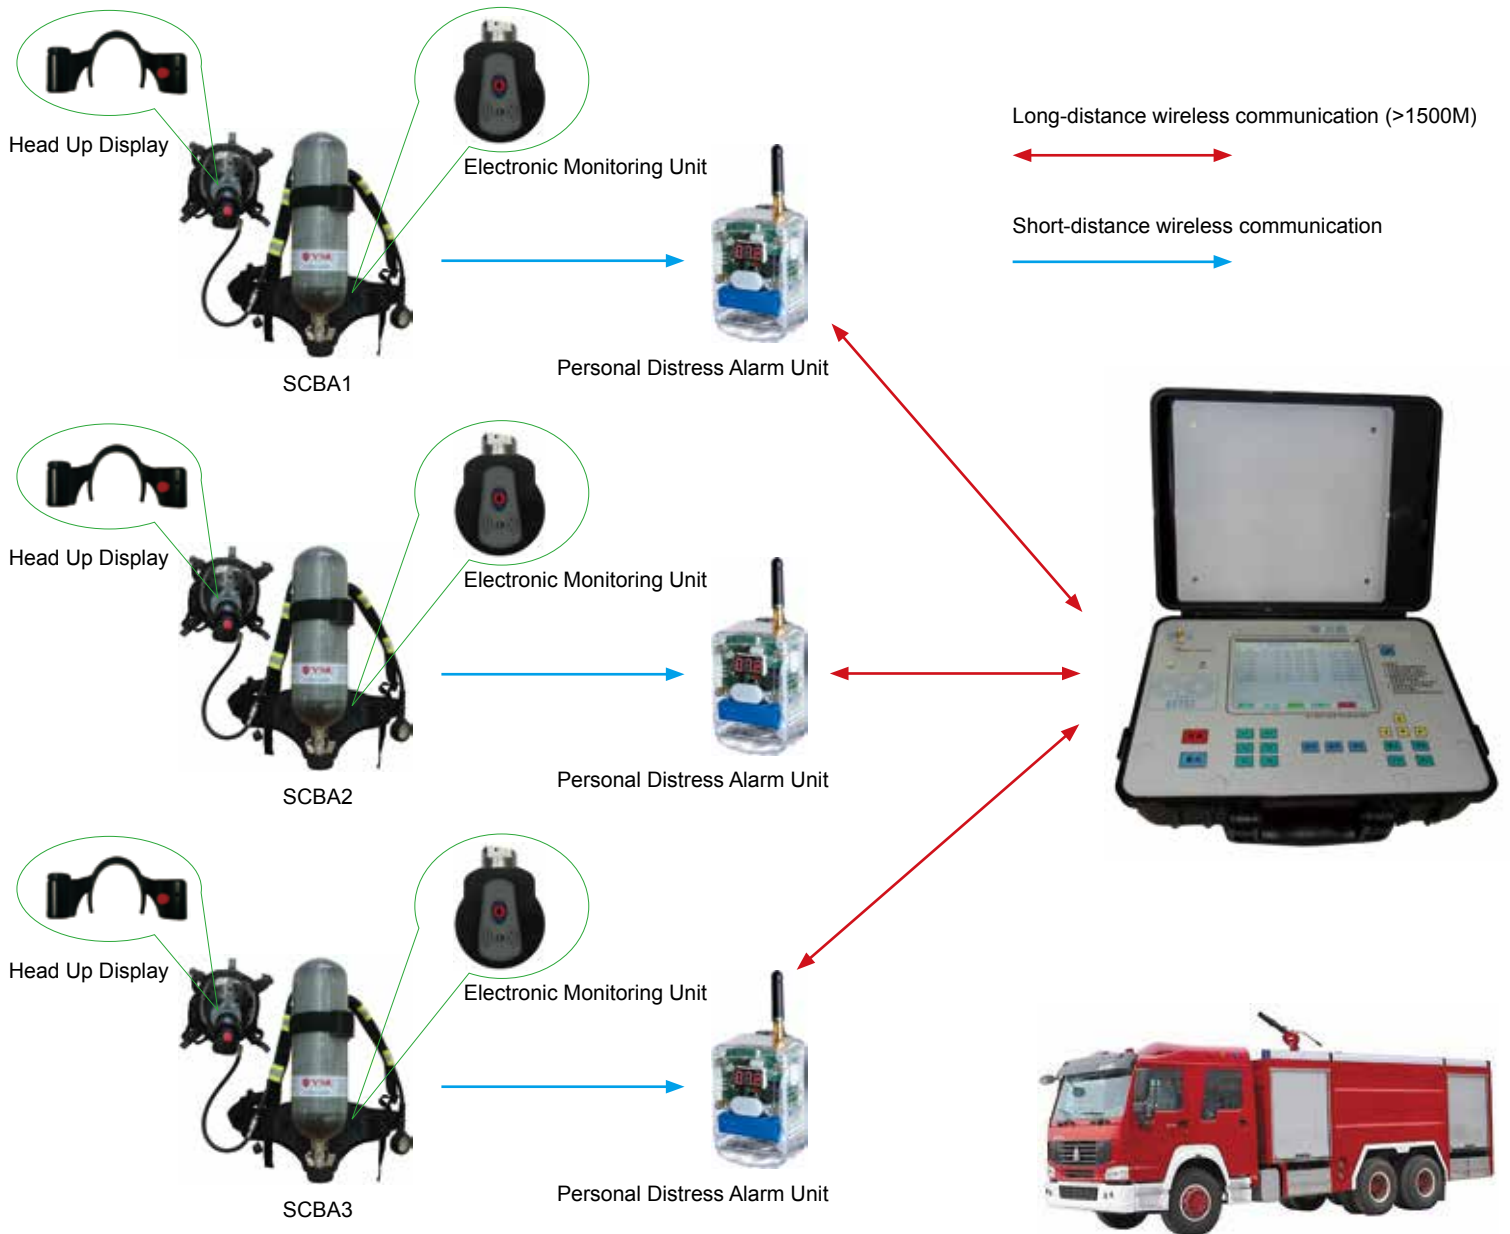

## Main Function

- 8 inch true color TFT LCD touch screen
- 8 Personal Distress Alarm Unit terminal module, long distance communication
- Real-time display the state of the firefighters: Sound and light alarm
- USB interface, with a USB disk. Data import and export is very convenient
- Built in high power lithium battery, white board and white board pen
- Host and sub machine can realize the non language contact



# EN Standard SCBA

Model No.: BAC2M6.8L\*2



• Natural silicon mask



• Demand valve



• Pressure regulator



• M18\*1.5 cylinder valve



• Pressure gauge



• Alarm whistle



• Nomex strips



• Fast connector coupling

- Product name: Self-contained positive pressure air breathing apparatus
- Cylinder Volume: 6.8\*2 L
- Cylinder Materials: Carbon Fiber
- Working pressure: 30Mpa
- Alarm pressure: 5.5±0.5Mpa
- Alarm sound: ≥90db
- Using temperature: -30℃ --60℃
- Time of using: 120 min
- Model Alternatives: 2, 3, 4.7, 9 L
- Standard: EN 137: 2006
- Gross Weight: 18 kg
- Packing Sizes: 40\*66\*84cm /carton

- 品名: 正压式消防空气呼吸器
- 气瓶容量: 6.8\*2 L
- 气瓶材质: 碳纤维复合材料
- 工作压力: 30Mpa
- 报警压力: 5.5±0.5Mpa
- 报警音量: ≥ 90db
- 工作温度: -30℃ --60℃
- 使用时间: 120 分钟
- 替代款式: 2, 3, 4.7, 9 升
- 执行标准: EN 137: 2006
- 产品毛重: 18 kg
- 包装尺寸: 40\*66\*84cm/ 箱

# Emergency Escape Breathing Device

## Model No.: EEBDS3L-H



- Product name: EEBD
- Cylinder material: steel
- Cylinder Volume: 3L
- Air volume: 600L
- Working pressure: 20Mpa
- Using temperature: -30°C --60°C
- Time of using: ≥ 15 min
- Weight: 7.5 kg
- Standard: EN137

- 产品名称: 紧急逃生呼吸器
- 气瓶材质: 钢瓶
- 气瓶容积: 3L
- 空气体积: 600L
- 工作压力: 20Mpa
- 工作温度: -30°C --60°C
- 使用时长: ≥ 15 min
- 产品重量: 7.5 kg
- 执行标准: EN137

## Model No.: EEBDC3L-M

- Product name: EEBD
- Cylinder material: steel, carbon fiber for option
- Cylinder Volume: 3L
- Air volume: 600L
- Working pressure: 20Mpa
- Using temperature: -30°C --60°C
- Time of using: ≥ 15 min
- Weight: 5 kg
- Standard: EN137

- 产品名称: 紧急逃生呼吸器
- 气瓶材质: 钢瓶, 碳纤维 (可选)
- 气瓶容积: 3L
- 空气体积: 600L
- 工作压力: 20Mpa
- 工作温度: -30°C --60°C
- 使用时长: ≥ 15 min
- 产品重量: 5 kg
- 执行标准: EN137



# EN Standard Fireman Helmet



## Model No.: FFHY

- Product name: Fireman Helmet
- Material: High temperature polyetherimide (PEI)
- Headband: aramid material, adjustable
- Color: yellow, white for option
- Flashlight (for option): anti-explosion type, up to 8 hours use time, 16000MCD, waterproof, shockproof
- Standard: EN443: 2008

- 产品名称: 消防员头盔
- 外壳材质: 耐高温聚醚酰亚胺
- 下颏带材质: 芳纶, 可调节
- 产品颜色: 黄色, 白色可选
- 手电筒 (选配): 防爆型, 长达 8 小时使用时间, 16000MCD, 防水, 防震
- 执行标准: EN443: 2008

## Model No.: FFHR

- Product name: Fireman Helmet
- Material: imported high temperature polyetherimide (PEI)
- Headband: aramid material, adjustable
- Color: red, yellow for option
- Flashlight (for option): anti-explosion type, up to 8 hours use time, 16000MCD, waterproof, shockproof
- Standard: NFPA1971: 2007, EN443: 2008

- 产品名称: 消防员头盔
- 外壳材质: 进口耐高温聚醚酰亚胺
- 下颏带材质: 芳纶, 可调节
- 产品颜色: 红色, 黄色可选
- 手电筒 (选配): 防爆型, 长达 8 小时使用时间, 16000MCD, 防水, 防震
- 执行标准: NFPA1971: 2007, EN443: 2008



# EN Standard Fireman Helmet

## Model No.: FFH-2Y



- Product name: Fireman Helmet
- Shell Material: imported high temperature polyetherimide (PEI)
- Headband: aramid material, adjustable
- Full protective shell with neck protection
- High strength and wear resistant PC Face shield
- 4-strap head harness for adjustable
- With reflective tapes on the both sides
- Color: yellow, red for option
- Flashlight (for option): anti-explosion type, up to 8 hours use time, 16000MCD, waterproof, shockproof
- Standard: NFPA1971: 2007, EN443: 2008

- 产品名称：消防员头盔
- 外壳材质：进口耐高温聚醚酰亚胺
- 下颏带材质：防火芳纶材质，可调节
- 带颈部防护的全面罩
- 高强度耐磨 PC 材质面屏
- 4 点可调节帽衬
- 帽体两侧贴有反光条
- 产品颜色：黄色，红色可选
- 手电筒（选配）：防爆型，长达 8 小时使用时间，16000 MCD，防水，防震
- 执行标准：NFPA1971: 2007, EN443: 2008

## Model No.: RH-2R

- Product name: Fireman Rescue Helmet
- Material : Made of thermo plastic, resistance of chemicals and high temperatures
- Shock absorbing system: made of polyurethane
- Headband: adjustable, heat resistant aramid material
- Chin straps: adjustable, heat resistant aramid material
- Reflective straps: on edges
- Helmet torch and eyes goggles can be equipped for option
- Standard: EN443:2008

- 产品名称：消防救援头盔
- 外壳材料：耐高温塑料
- 减震系统：聚氨酯
- 头带：可调节，防火芳纶材质
- 下颏吸汗带：可调节，防火芳纶材质
- 反光带：头盔边缘分布
- 手电筒和护目镜可选装
- 执行标准：EN443:2008



# EN Standard Firefighter Hood

**Model No.: NMXF-635**



## Application

- This hood is used during fire-fighting, to protect the head and neck areas of the fire-fighters from heat and flames.

## Material

- Knitted fabric 50% aramid 50% CV FR fabric, 200g/m<sup>2</sup>, dual layers

## Technical Parameters

- All details on EN 13911: 2004 test report

## Standard

- EC type accordance with Directive 89/686 / EEC
- EN 13911: 2004

## Features

1. The hood covers the whole head, neck, part of the chest and part of the shoulders.
2. The hood have face opening, starting above the eyes, reaches under the nose and chin is covered with the hood.
3. The hood makes sure free movement of the head, very comfort to the user, can be used together with other personal protective equipment, such as helmet and mask respirator.
4. The hood has adequate flexibility to suit all sizes and head shapes.
5. The hood has all seams by 2 needle stitch, and the connection of the parts to be with “cut & stitch”
6. The sewing threads of the hood is of 100% non-combustible fibers.
7. The color of the hood not fade on high temperatures.
8. The hoods not melt, or drip or ignite, or break or gather more than 10% heat when at temperature 260 C

# EN Standard Firefighter Gloves



## Model No.: FFGN-NB

- Product name: Firefighter Gloves
- Outer shell: m-aramid, p-aramid
- Moisture barrier: aramid felt with PTFE membrane
- Thermal barrier: Aramid felt
- Comfortable lining : flame retardant cotton
- With reinforced layer of palm, thumbs and wrist
- Reinforced layer: wear resistant cowhide
- Standard: EN 659: 2003

- 品 名: 消防手套
- 外 层: 间位芳纶, 对位芳纶
- 防潮层: 芳纶毡, PTFE 隔水膜
- 隔热层: 芳纶面料
- 舒适层: 阻燃棉布
- 手掌, 大拇指和腕部增加耐磨层
- 加强层: 耐磨牛皮
- 执行标准: EN 659: 2003

## Model No.: FFGN-KK

- Product name: Firefighter Gloves
- Outer shell: m-aramid, p-aramid
- Moisture barrier: aramid felt with PTFE membrane
- Thermal barrier: Aramid felt
- Comfortable lining : flame retardant cotton
- With reinforced layer of palm, thumbs and wrist
- Reinforced layer: wear resistant quality cowhide
- Standard: EN 659: 2003

- 品 名: 消防手套
- 外 层: 间位芳纶, 对位芳纶
- 防潮层: 芳纶毡, PTFE 隔水膜
- 隔热层: 芳纶面料
- 舒适层: 阻燃棉布
- 手掌, 大拇指和腕部增加耐磨层
- 加强层: 耐磨优质牛皮
- 执行标准: EN 659: 2003



# EN Standard Firefighter Gloves



## Model No.: FFGL-Y

- Product name: Leather Firefighter Gloves
- Outer shell: Quality Cowhide with waterproof, heat resistant and wear resistant
- Moisture barrier: aramid felt with PTFE membrane
- Thermal barrier: Aramid felt
- Comfortable lining : flame retardant cotton
- Features: full leather and comfortable wristlets
- With high visibility reflective tapes
- Standard: EN 659: 2004

- 品 名: 牛皮消防手套
- 外 层: 优质耐磨防火防水牛皮
- 防潮层: 芳纶毡, PTFE 隔水膜
- 隔热层: 芳纶面料
- 舒适层: 阻燃棉布
- 特 点: 柔软舒适的腕套
- 手背有高亮反光条
- 执行标准: EN 659: 2004

## Model No.: FFGL-B

- Product Name: Leather Firefighter Glove
- Outer shell: Flame retardant leather
- Moisture barrier: aramid felt with PTFE membrane
- Thermal barrier: aramid felt
- Comfortable lining: membrane system laminated to 100% interlock knitting para-aramid fabric
- Features: full leather and elastic wristlets
- Reflective tape: with yellow-gray-yellow tapes

- 品 名: 牛皮消防手套
- 外 层: 阻燃牛皮
- 防潮层: 芳纶毡, PTFE 隔水膜
- 隔热层: 芳纶面料
- 舒适层: 100% 针织芳纶面料层压内膜
- 特 点: 全皮手套和松紧带腕套
- 反光条: 黄灰色反光条



# EN Standard Firefighter Boots

## Model No.: FF BEN



- At YSE we provide FF BEN fire boots to protect fire fighters from enduring heat and moisture during critical times.
- YSE used to construct FF BEN fire boots for maximum comfort and accurate fit. In addition, the innersole system includes a high-density polyurethane midsole that absorbs energy. The second layer of comfort includes an breathable polyurethane footbed that provides all-day comfort. The footbed fabric cover absorbs perspiration and is removable for fast drying.

### Features

- Allows generous layers of insulation material to fit inside the toe cap to reduce conductive heat.
- Dual-purpose design is textured for stability and cushioned for comfort.
- Designed with multi-directional lug pattern, using high-traction rubber compound.
- Knit toe lining with polymeric foam insulation.
- Light-weight construction, high-temperature resisting reflective patches.
- Withstand 18 KV of life current at dry condition



### Steel toe cap

- Meets EN ISO 20345 impact and compression tests
- Reliable protection in cold & hot environments



### Anti-slip

- Anti-slip, oil resistant and flame retardant sole
- Electric shock resistant

### Specification



Material of top cap and plate	stainless steel
Material of upper	vulcanized rubber
Color	black and yellow
Size	European size 38 - 47
Weight	≤ 2.8kg / pair
Certification	CE EN15090:2006 & GA6-2004
Withstand voltage	≥ 18000 V
Outsole penetration resistance	≥ 1100N
Bottom of steel plate pierce resistant	≥ 5000N



# EN Standard Firefighter Boots

## Model No.: FF BEN-PB



- Product name: Firefighter Boots
- Material: Flame resistant rubber with steel plate
- Withstand voltage:  $\geq 10000V$
- Pierce resistance:  $\geq 6000N$
- Size: 38-48 (EUR)
- Color: black
- Weight: 2.8kg
- Standard: EN15090: 2006

- 产品名称: 消防靴
- 产品材质: 耐高温橡胶, 内嵌钢板
- 承受电压:  $\geq 10000V$
- 抗穿刺力:  $\geq 6000N$
- 产品尺码: 欧标 38-48
- 产品颜色: 黑色
- 产品重量: 2.8kg
- 执行标准: EN15090: 2006

## Model No.: FFBL

- Product Name: Leather Firefighter Boots
- Boots vamp: water-resistant breathable full grain leather
- Outsole: heavy rubber
- Insole: made from shaped polypropylene and ceramic-coated fabrics
- Cushioning system: durable and water resistant latex foam
- Antislip tread: made from a mixture of nitrile rubber, antislip, resistant to oils, hydrocarbons, and to heats.
- Toe Cap: steel toe cap
- Midsole: steel midsole
- Size: 38-48 (EUR)
- Color: black
- Weight: 2.2kg
- Standard: EN15090:2006

- 产品名称: 消防皮靴
- 靴面: 防水透气头层牛皮
- 靴底: 黑色硫化橡胶制成
- 靴内底: 由成型的聚丙烯和陶瓷涂层面料制成
- 缓冲系统: 防水耐用乳胶泡沫
- 防滑胎面: 由丁腈橡胶的混合物, 防滑, 耐油, 耐高温, 防霜冻
- 靴头: 强化钢料
- 靴底夹层: 钢板夹层
- 鞋码: 38-48 (欧标)
- 颜色: 黑色
- 重量: 2.2kg
- 标准: EN15090: 2006



# EN Standard Safety Belts



## Model No.: FRHS01

- Product name: Full Body Harness
- Description: Unique adjustable leg strap design, and the entire harness goes on effortlessly
- Weight: 2.1kg
- Standard: EN813, EN358

- 产品名称: 全身式安全带
- 产品描述: 可调节腿带设计, 穿戴迅速。
- 产品重量: 2.1kg
- 适用标准: EN813, EN358



## Model No.: FRHS02

- Product name: Full Body Harness
- Description: the dorsal D-ring allows adjustment for different size rescuers
- Weight: 2.4kg
- Standard: EN813, EN358

- 产品名称: 全身式安全带
- 产品描述: 针对不同人群, 可调整的背部 D 形环
- 产品重量: 2.4kg
- 适用标准: EN813, EN358



## Model No.: FSB01

- Product name: Fire Safety Belt
- Description: Nylon yarn, used for fireman working at height, ladder access and escape.
- Belt tension strength  $\geq 14\text{kN}$ , 7cm width.
- Standard: GA494-2004

- 产品名称: 消防安全腰带
- 产品描述: 尼龙材质, 专门用于消防员高空作业, 登梯作业和逃生自救。
- 安全带拉力  $\geq 14\text{kN}$ , 宽度 7cm。
- 适用标准: GA494-2004

# Fire Fighting Rescue Axe

## Model No.: FRA1



- Product name: Fire Axe
- Material: 45# Stainless Steel
- Length: 34cm
- Width: 20cm
- Thickness: 2cm
- Weight: 0.8kg
- Standard: National GA138-1996

- 产品名称: 消防员腰斧
- 产品材质: 45# 不锈钢
- 产品长度: 34cm
- 产品宽度: 20cm
- 产品厚度: 2cm
- 产品重量: 0.8kg
- 执行标准: 国标 GA138-1996

## Model No.: SH1A



- Product name: Safety Hook
- Material: Stainless Steel
- Lock length: 23.8mm
- Overall length: 114.8mm
- Overall width: 70mm
- Load bearing: >50KN

- 产品名称: 消防安全钩
- 产品材质: 不锈钢
- 锁柱长度: 23.8mm
- 整体长度: 114.8mm
- 整体宽度: 70mm
- 最大承重: >50KN

## Model No.: RR1A



- Product name: Rescue Rope
- It is made of advanced nylon to prevent rupture, it has excellent flexibility and impact. It adopts special weaving method.

- 产品名称: 救援绳
- 救援绳采用高级尼龙防止断裂, 极佳的柔韧性和抗冲击性, 绳体采用特殊编制方法, 顺滑耐磨。

# EN Standard Safety Helmet

## Model No.: ISH-F1B



- Product name: Safety Helmet with face-shield
- Shell material: ABS
- Face-shield material: PC
- Features: V- type top
- Color: blue / customized
- Weight: 700 g
- Working temperature: -38℃ --60℃
- OEM: original manufacture/ logo
- Package: 36pcs/carton (82\*54\*45cm)
- Standard: EN397: 2012 & GB2811-2007
- Applicable scope: electric power, chemical, mining, construction, mechanical, geological, transportation etc.

- 产品名称: 面罩款工业安全头盔
- 外壳材质: ABS
- 面罩材质: PC
- 产品特点: V 型顶
- 产品颜色: 蓝色或客户自定义
- 全套重量: 700 g
- 工作温度: -38℃ --60℃
- OEM: 印制客户标志
- 产品包装: 30 个 / 箱 (82\*54\*45cm)
- 执行标准: EN397: 2012 & GB2811-2007
- 使用范围: 电力, 化工, 工矿, 建筑, 机械, 地质, 交通运输等

## Model No.: ISHR

- Product name: Industrial Safety Helmet
- Shell material: ABS
- Features: V-type top
- Color: red / customized
- Working temperature: -38℃ --60℃
- OEM: original manufacture/ logo
- Package: 40pcs/carton (77x53x44cm)
- Standard: EN397: 2012

- 产品名称: 工业安全头盔
- 外壳材质: ABS
- 产品特点: V 型顶
- 产品颜色: 红色或客户自定义
- 工作温度: -38℃ --60℃
- OEM: 印制客户标志
- 产品包装: 40 个 / 箱 (77x53x44cm)
- 执行标准: EN397: 2012



# EN Standard Communication Mask

## Model No.: CGM



- Product name: Communication Gas Mask
- Material: PC, natural silicone, glass fiber
- Visual field :  $\geq 91\%$
- Maximum output power: 2W
- Amplified current: 100 - 500mA
- Loudspeaker impedance: 8  $\Omega$
- Output distortion:  $\leq 5\%$
- Battery voltage: DC - 3V
- Features: Compatible with multiple brands of walkie-talkie
- Standard: EN 136 & EN 137

- 品 名： 通讯面罩
- 材 质： PC, 硅胶, 玻璃纤维
- 视野率：  $\geq 91\%$
- 最大输出： 2W
- 电流放大： 100 - 500mA
- 扬声器阻抗： 8  $\Omega$
- 输出失真：  $\leq 5\%$
- 电池电压： DC - 3V
- 产品特点： 适配多种品牌对讲机
- 执行标准： EN 136 & EN 137

## Model No.: FEM01

- Product name: Fire Escape Mask
- Material: aluminized fabric, stainless
- Defense gas: HCN, CO, HCL poison gas
- Service time: 40 min
- Inhalation resistance:  $< 800$  Pa
- Exhalation resistance:  $< 300$  Pa
- Storage temperature: 0°C - 40°C
- Weight: 620g
- Standard: EN 403

- 品 名： 火灾逃生面罩
- 材 质： 铝箔防火材料, 不锈钢滤罐
- 防护气体： 氯化氢, 氰化氢, 一氧化碳等毒气
- 使用时间： 40 分钟
- 吸气阻力：  $< 800$  Pa
- 呼气阻力：  $< 300$  Pa
- 存储温度： 0°C - 40°C
- 重 量： 620g
- 执行标准： EN 403



# EN Standard Full Face Gas Mask

## Model No.: GMBS



- Product name: Full Face Gas Mask
- Material: silicon gel
- Visual field :  $\geq 91\%$
- Cartridge: single
- Weight: 560g (without cartridge)
- Color: black
- Standard: EN 136
- Using Time: 40-50 mins
- Anti Gas Type: hydrocyanic acid, hydrogen chloride, arsine, phosgene, double phosgene, chloropicrin, benzene, methyl bromide, methylene chloride, lewisite gas, mustard gas, phosphine, sulfur dioxide, hydrogen fluoride, hydrogen sulfide etc.

- 品 名: 防毒全面罩
- 材 质: 天然硅胶
- 视野率:  $\geq 91\%$
- 滤毒罐: 1 个
- 重 量: 560g (不带滤毒罐)
- 颜 色: 黑色
- 执行标准: EN 136
- 使用时间: 40-50 mins
- 防护气体: 氢氰酸, 氯化氢, 砷化氢, 碳酰氯, 双碳酰氯, 氯化苦, 苯, 甲基溴, 二氯甲烷, 刘易斯毒气, 芥子气, 磷化氢, 二氧化硫, 氟化氢, 硫化氢等等

## Model No.: GMBD

- Product name: Full Face Gas Mask
- Material: silicon gel
- Visual field :  $\geq 91\%$
- Cartridge: double
- Color: black
- Weight: 580g (without cartridge)
- Standard: EN 136
- Using Time: 50-60 mins
- Anti Gas Type: hydrocyanic acid, hydrogen chloride, arsine, phosgene, double phosgene, chloropicrin, benzene, methyl bromide, methylene chloride, lewisite gas, mustard gas, phosphine, sulfur dioxide, hydrogen fluoride, hydrogen sulfide etc.

- 品 名: 防毒全面罩
- 材 质: 天然硅胶
- 视野率:  $\geq 91\%$
- 滤毒罐: 2 个
- 颜 色: 黑色
- 重 量: 580g (不带滤毒罐)
- 执行标准: EN 136
- 使用时间: 50-60 mins
- 防护气体: 氢氰酸, 氯化氢, 砷化氢, 碳酰氯, 双碳酰氯, 氯化苦, 苯, 甲基溴, 二氯甲烷, 刘易斯毒气, 芥子气, 磷化氢, 二氧化硫, 氟化氢, 硫化氢等等



# EN Standard Full Face Gas Mask



## Model No.: GMYS

- Product name: Full Face Gas Mask
- Material: silicon gel
- Visual field :  $\geq 91\%$
- Cartridge: single
- Color: yellow
- Weight: 560g (without cartridge)
- Standard: EN 136
- Using Time: 40-50 mins
- Anti Gas Type: hydrocyanic acid, hydrogen chloride, arsine, phosgene, double phosgene, chloropicrin, benzene, methyl bromide, methylene chloride, lewisite gas, mustard gas, phosphine, sulfur dioxide, hydrogen fluoride, hydrogen sulfide etc.

- 品名: 防毒全面罩
- 材质: 天然硅胶
- 视野率:  $\geq 91\%$
- 滤毒罐: 单
- 颜色: 黄色
- 重量: 560g (不含滤毒罐)
- 执行标准: EN 136
- 使用时间: 40-50 mins
- 防护气体: 氢氰酸, 氯化氢, 砷化氢, 碳酰氯, 双碳酰氯, 氯化苦, 苯, 甲基溴, 二氯甲烷, 刘易斯毒气, 芥子气, 磷化氢, 二氧化硫, 氟化氢, 硫化氢等等

## Model No.: GMYD

- Product name: Full Face Gas Mask
- Material: silicon gel
- Visual field :  $\geq 91\%$
- Cartridge: double
- Color: yellow
- Weight: 580g (without cartridge)
- Standard: EN 136
- Using Time: 50-60 mins
- Anti Gas Type: hydrocyanic acid, hydrogen chloride, arsine, phosgene, double phosgene, chloropicrin, benzene, methyl bromide, methylene chloride, lewisite gas, mustard gas, phosphine, sulfur dioxide, hydrogen fluoride, hydrogen sulfide etc.

- 品名: 防毒全面罩
- 材质: 天然硅胶
- 视野率:  $\geq 91\%$
- 滤毒罐: 双
- 颜色: 黄色
- 重量: 580g (不含滤毒罐)
- 执行标准: EN 136
- 使用时间: 50-60 mins
- 防护气体: 氢氰酸, 氯化氢, 砷化氢, 碳酰氯, 双碳酰氯, 氯化苦, 苯, 甲基溴, 二氯甲烷, 刘易斯毒气, 芥子气, 磷化氢, 二氧化硫, 氟化氢, 硫化氢等等





## EN Standard Chemical Suit

### Model No.: LDCPS-R

- Product name: Light-duty Chemical Protective Suit
- Shell: high-grade Nylon PVC
- Thickness: 0.38mm
- Gas tightness:  $\leq 300\text{pa}$
- Tearing strength:  $\geq 30\text{N}$
- Seam strength:  $\geq 200\text{N}$
- Weight:  $\leq 4.3\text{kg/set}$
- Standard: EN14126

- 品名: 轻型化学防护服
- 外层材料: 高级尼龙 PVC
- 外层厚度: 0.38mm
- 气密性:  $\leq 300\text{pa}$
- 撕破强力:  $\geq 30\text{N}$
- 接缝强力:  $\geq 200\text{N}$
- 产品重量:  $\leq 4.3\text{Kg}$
- 执行标准: EN14126

### Model No.: HDCPS-R

- Product name: Heavy-duty Chemical Protective Suit
- Shell: Fire-retardant polyamide fiber PVC
- Thickness: 0.5mm
- Waterproof penetration: 20min
- Tearing strength:  $\geq 50\text{N}$
- Seam strength:  $\geq 250\text{N}$
- Weight:  $\leq 7.2\text{ kg/set}$
- Standard: EN943-2:2002

- 品名: 重型化学防护服
- 外层材料: 阻燃尼龙 PVC
- 外层厚度: 0.5mm
- 抗水渗透性: 20 分钟
- 撕破强力:  $\geq 50\text{N}$
- 接缝强力:  $\geq 250\text{N}$
- 产品重量:  $\leq 7.2\text{Kg}$
- 执行标准: EN943-2:2002





# EN Standard Safety Shoes

## Model No.: K01



- Product name: Safety Shoes
- According to CE EN ISO 20345:2011 S1P
- Upper: 1.8-2.0mm Black Barton Printed Buffalo Leather
- Lining: Grey Permeable BK Mesh, Non-woven
- Insole: Anti-bacterial and comfortable
- Outsole: Dual Density PU outsole mould 905, which is Oil resistant, Anti-slip, Shock resistant, Abrasion resistant.
- Size: 35-47

- 品名: 防砸防刺穿安全鞋
- 鞋面: 1.8-2.0mm 黑色压花皮 / 灰色透气 BK 网布, 无纺布内里 / 防尘封闭鞋舌 / 双密度 PU 注塑大底 / 防臭舒适鞋垫
- 大底: 防滑、耐油、防震、耐磨 NO.905
- 适用范围: 建筑业、工矿企业、汽车制造业、物流货运等
- 鞋码: 35-47
- 标准: EN ISO 20345:2011 S5

## Model No.: K801

- Product name: Safety Shoes
- According to CE EN ISO 20345:2011 S1P
- Upper: 2.0-2.2mm Black Barton Printed Buffalo Leather
- Lining: Grey Permeable BK Mesh, Non-woven
- Insole: Anti-bacterial and comfortable
- Outsole: Dual Density PU outsole mould 912 or Rubber outsole mould 609, which is Anti-static, Anti-puncture, Anti-slip, Shock resistant, Abrasion resistant and Oil resistant.
- Size: 36-46

- 品名: 防砸防刺穿安全鞋
- 鞋面: 2.0-2.2mm 黑色压花水牛皮、灰色透气堪培拉、无纺布内里 / 双密度 PU 注塑大底、防臭舒适鞋垫
- 大底: 耐油、防滑、防震、耐磨 NO.912/ NO.609
- 适用范围: 建筑业、工矿企业、汽车制造业、矿山、伐木业等
- 鞋码: 35-47
- 标准: EN ISO 20345:2011 S5



# Fire Fighting Rescue Tools



## Model No.: FRL1A

- Product name: Rescue Ladders
- • Standard load:  $\geq 4500\text{N}$
- • Max load: 6500N
- • Length: 5m, 10m, 12m, 20m customizable
- • Ladder width: 32cm
- • Ladder weight: 0.68kg/m
- • Clamp weight: 2.5kg/pc
- • Aluminium alloy rung
- • Steel wire:  $\varnothing 4\text{mm}$
- 产品名称: 消防逃生梯
- • 额定载重:  $\geq 4500\text{N}$
- • 最大载重: 6500N
- • 产品长度: 5m, 10m, 12m, 20m 可定制
- • 产品宽度: 32cm
- • 绳体重量: 0.68kg/m
- • 多功能夹: 2.5kg/pc
- • 铝合金多功能夹
- • 钢索直径:  $\varnothing 4\text{mm}$



## Model No.: FFFLO2A

- Product name: Portable Searchlight
- Rated voltage: DC11.1V
- Rated capacity: 4000mAh
- Rated Power: 3x3W
- Working Hours: 16h (normal light)
- Ingress Protection: IP68
- 产品名称: 手提式防爆探照灯
- 额定电压: DC11.1V
- 额定容量: 4000mAh
- 额定功率 (LED): 3x3W
- 工作时长: 16h (正常光)
- 防护等级: IP68



## Model No.: FFFL01

- Product name: Flashlight for fireman helmet
- Rated voltage: DC3.7V
- Rated capacity: 2000mAh
- Rated Power: 3W
- Working Hours: 8h (normal light)
- Ingress Protection: IP68
- 产品名称: 消防头盔手电筒
- 额定电压: DC3.7V
- 额定容量: 2000mAh
- 额定功率 (LED): 3W
- 工作时长: 8h (正常光)
- 防护等级: IP68

# Fire Safety Rescue Tripod

## Model No.: FRTTP01



- Product name: Rescue Tripod
- Material: High strength Aluminum
- Operating Load: 300kg
- Breaking Force: 22KN(Steel wire Rope)
- Working Scope: 134-214cm
- Closed Height: 134cm
- Extend Height: 214cm
- Weight: 16.5kg
- Length of Wire: 25m
- Operating Load: 200kg

- 产品名称: 救援三脚架
- 产品材质: 高强度铝合金
- 额定载荷: 300kg
- 阻断力: 22KN
- 收缩高度: 134cm
- 展开高度: 214cm
- 产品重量: 16.5kg
- 钢缆长度: 25m
- 绞盘荷载: 200kg

## Model No.: CS3800

- Product name: Chainsaw
- Power type: Single Cylinder, Two-stroke, Air-cooling
- Gasoline engine
- Displacement: 38cc
- Rated output power: 1.2kw
- Oil tank capacity: 216ml
- Gasoline/2-cycle oil mixing ratio: 25:1
- Guide bar size: 14" / 16"
- Gross weight: 6.6kg

- 产品名称: 机动链锯
- 动力类型: 单缸, 两冲程, 风冷
- 汽油发动机
- 排量: 38cc
- 最大输出功率: 1.2kw
- 油箱容量: 216ml
- 汽油与2冲程机油混合比: 25:1
- 导向杆尺寸: 14" / 16"
- 产品重量: 6.6kg





## EN Standard Folding Stretcher

### Model No.: FS2

- Product name: Folding Stretcher
- Material: aluminum alloy tube, oxford fabric
- Operating load: 120kg
- Tube thickness: 2mm
- Unfold size: 203\*52\*13cm
- Folding size: 103\*20\*12cm
- Weight: 5.4kg
- Package: single package, 4 pcs/carton

- 产品名称: 二折担架
- 产品材质: 铝合金管, 加厚牛津布
- 标准承重: 120kg
- 管壁厚度: 2mm
- 展开尺寸: 203\*52\*13cm
- 折叠尺寸: 103\*20\*12cm
- 产品重量: 5.4kg
- 包装: 独立纸箱包装, 4 件 / 箱

### Model No.: FS4

- Product name: 4 Folding Stretcher
- Material: aluminum alloy tube, oxford fabric
- Operating load: 120kg
- Tube thickness: 3mm
- Unfold size: 213.5\*53\*13cm
- Folding size: 63\*25\*16cm
- Weight: 7.0kg
- Package: single package, 2 pcs/carton

- 产品名称: 四折担架
- 产品材质: 铝合金管, 加厚牛津布
- 标准承重: 120kg
- 管壁厚度: 3mm
- 展开尺寸: 213.5\*53\*13cm
- 折叠尺寸: 63\*25\*16cm
- 产品重量: 7.0kg
- 包装: 独立箱包装, 2 件 / 箱



# EN Standard Fire Blankets



## Model No.: FFBK03

- Product name: Fire Blanket
- Material: 100% high-grade fiberglass
- Thickness: 0.41mm
- Color: white
- Withstand temperature: 550°C (1020 F)
- Size: 1.2\*1.8m (customization)
- Net weight: 1.18kg (1.2\*1.8m)
- Package: PVC hard box
- Standard: EN1869: 1997; ASTM F 1989-2005

- 产品名称: 灭火毯
- 产品材质: 100% 玻璃纤维
- 材料厚度: 0.41mm
- 产品颜色: 白色
- 承受高温: 550 摄氏度
- 产品尺寸: 1.2\*1.8m (可定制)
- 产品重量: 1.18kg (1.2\*1.8m)
- 产品包装: PVC 硬盒
- 执行标准: EN1869: 1997; ASTM F 1989-2005

## Model No.: FFBK01

- Product name: Fire Blanket
- Material: 100% high-grade fiberglass
- Thickness: 0.41mm
- Color: white
- Withstand temperature: 550°C (1020 F)
- Size: 1.0\*1.0m (customization)
- Net weight: 0.6kg (1.0\*1.0m)
- Package: PVC bag
- Standard: EN1869: 1997; ASTM F 1989-2005

- 产品名称: 灭火毯
- 产品材质: 100% 玻璃纤维
- 材料厚度: 0.41mm
- 产品颜色: 白色
- 承受高温: 550 摄氏度
- 产品尺寸: 1.0\*1.0m (可定制)
- 产品重量: 0.6kg (1.0\*1.0m)
- 产品包装: 塑料软袋
- 执行标准: EN1869: 1997; ASTM F 1989-2005





**Your safety expert**



[www.ysefire.com](http://www.ysefire.com)



 Scan me !

上海永事逸消防设备有限公司

Shanghai YSE Fire Fighting Equipments Co., Ltd

地址：中国上海市杨浦区宁国路 313 号

Address: No. 313 Ningguo Road, Yangpu District, Shanghai, China

电话 (TEL): +86 21 6567 0639 手机 (Mobile): +86 18321811425

传真 (FAX): +86 21 6567 0639 邮箱 (E-mail): info@ysefire.com

Skype: yse-delia WhatsApp: +86 18321811425

WeChat: 844337546 QQ: 2880098593